

## Indoor Access Point Switch NX-AP5720H-WA6



### OVERVIEW

NODEXON NX-AP5720H-WA6 access point is the latest generation Wall-Mount wireless access point developed based on 802.11ax standard. They are designed with creative dual-radio 802.11ax technology standard respectively, and provide a transmission speed at least 2 times faster than 802.11ac products. High performance and cost-effective Wi-Fi 6 (802.11ax) for hospitality, branch, and teleworker deployments.

### FEATURES HIGHLIGHTS

- New-generation Wi-Fi standard 802.11ax (Wi-Fi 6)
- Remote probing and analysis
- DL/UL MU-MIMO
- Smart cloud access and optimal WLAN TCO
- Spatial multiplexing
- Green design
- Local forwarding
- Orthogonal frequency division multiple access (OFDMA)
- IPv4 and IPv6 dual stack (Native IPv6)
- End user Admission Defense (EAD)



## Indoor Access Point Switch NX-AP5720H-WA6



### PRODUCT FEATURES

#### HIGH-DENSITY WIFI EXPERIENCE

##### Install AP in 3 to 5 minutes

Wall-Mount series AP uses the international standard wall plate design. Installing an AP is just as simple as installing other switching panels. All it takes is 5 steps in less than 5 minutes which effectively accelerates the wireless network deployment process.

##### New-generation Wi-Fi standard 802.11ax (Wi-Fi 6)

NX-AP5720H-WA6 dual-radio AP adopts 802.11ax technology can provide up to 1.775Gbps access rate, which is suitable for hotel guest room, small office.

##### DL/UL MU-MIMO

NODEXON NX-AP5720H-WA6 AP supports DL/UL MU-MIMO technology, which is the most important feature of 802.11ax. DL/UL MU-MIMO technology allows AP to send data to multiple stations simultaneously, breaking through the traditional wireless serial communication mechanism, increasing the utilization rate of wireless spectrum resources, improving the number of effective access users and access experience under highdensity deployment.

##### Smart cloud access and optimal WLAN TCO

The NX-AP5720H-WA6 complies with the 802.11ax standard. It works on dual radio and provides high-speed transmission that is at least 2 times faster than 802.11ac products under the same conditions. The NX-AP5720H-WA6 is available for easy maintenance and management from the NODEXON Cloudnet platform. Through smart RF optimization technologies, the series provides mobile cloud access in coverage scope, access density, and operation stability, and achieves the optimal wireless network Total Cost of Ownership (TCO).

##### Spatial multiplexing

802.11ax assigns a different color per BSS to help NX-AP5720H-WA6 identify co-channel interference and stop transmission in time. If a radio detects 802.11ax signals from a BSS that has the same color as the radio's BSS, it determines that co-channel interference exists and stops data transmission. This optimizes frequency reuse and improves network capacity.

## Indoor Access Point Switch NX-AP5720H-WA6



### Local forwarding

NX-AP5720H-WA6 supports both centralized forwarding and local forwarding. With centralized forwarding, APs tunnel incoming data frames to the AC and the AC forwards the data frames. With local forwarding, APs directly forward data frames. The local forwarding mode significantly saves wired bandwidth.

### Real Time Spectrum Guard (RTSG)

- Real Time Spectrum Guard (RTSG) is the innovative NODEXON professional state-monitoring program for the wireless spectrum. NODEXON 802.11ax series AP supports the internal RF data acquisition module to achieve deeply integrated monitoring and real time spectrum protection.
- The RTSG Console is integrated into the iMC (intelligent Management Center), and performs data acquisition through the CAPWAP tunnel management and Sensor AP. It can achieve 24x7 wireless signal quality monitoring, trend assessment and unauthorized interference alert. Through active probe and 2.4GHz/5GHz RF interference source (WiFi or non-WiFi) in every band, it provides a graphic representation of real-time FFT plot of the spectral density plot, spectrum diagram, the duty cycle map, event spectrum diagram, channel gain and interference gain. It can also automatically identify the source of interference, to determine the location of rogue wireless equipment, to ensure the wireless network is always in great shape. Combined with NODEXON iMC IAR (Intelligent Analysis Report) module, it can maintain a complete history of RF quality in the coverage area, including its trace and playback, automatically generate customized trend, compliance and audit reports.

### Intelligent unified wired and wireless management

- The whole series of NODEXON wireless products can be managed by the Wireless Service Manager (WSM) component of NODEXON Intelligent Management Center (IMC). WSM provides unified management of wired and wireless networks, adding wireless network management functions into existing wired network management systems.
- WSM offers a simple and user friendly management platform for wireless network administrators. It implements panel management, troubleshooting, performance monitoring, software version control, configuration management, and user access management of wireless devices. In addition, it can manage wired devices by cooperating with other components in IMC.

### Cloud-based Management

NODEXON cloud-managed APs were developed based on the Cloudnet platform, on which network administrators can manage the cloud-managed APs directly, for example, view cloud-managed AP status in real time and deploy configurations from the cloud to cloud-managed APs. This greatly improves network efficiency and enhances security and stability.

## Indoor Access Point Switch NX-AP5720H-WA6



### Built-in Bluetooth


NODEXON NX-AP5720H-WA6 adopts built-in Bluetooth module which can support 10m long-distance Console function, avoid additional workload in the process of equipment installation and maintenance, reduce the difficulty of troubleshooting, and support iBeacon shaking.

### RF Optimizing Engine (ROE)


ROE, through feature- and protocol-based RF optimization, provides greater speed and QoS in middle- to high-density access and streaming media transmission scenarios. It provides features such as multi-user fairness, mixed access fairness, interference filtering, speed optimization, band navigation, multicast optimization (IPv4/IPv6), per-packet power control, and intelligent bandwidth guarantee.

### Antenna Patterns

Radio1: 5GHz (AP front facing right)

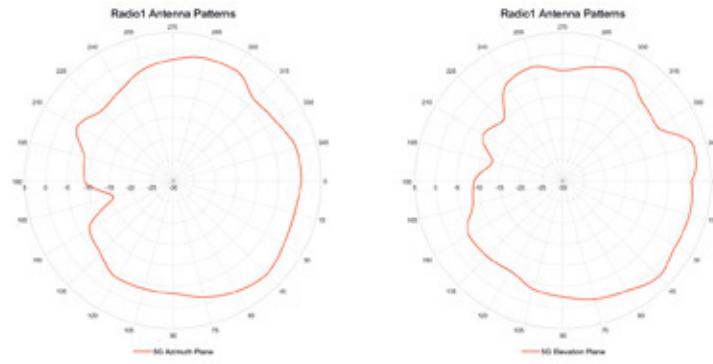

Radio2: 2.4GHz (AP front facing right)

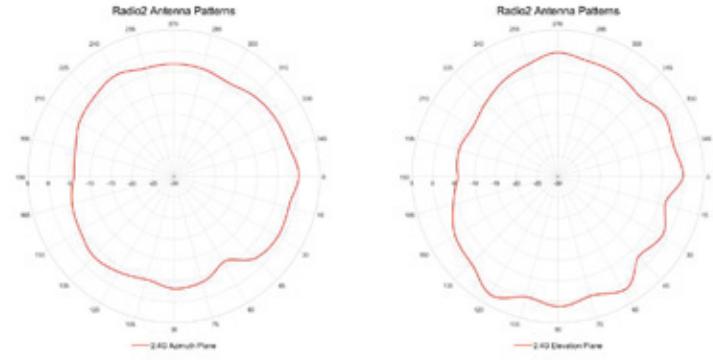

# Indoor Access Point Switch

## NX-AP5720H-WA6



### TECHNICAL SPECIFICATIONS

SPECIFICATIONS		NX-AP5720H-WA6
Ports		4x100/1000Mbps Ethernet ports, 1x RJ45 pass-through port, 1x USB port 1x Console port
Dimensions (WxDxH)		160mm×86mm×30mm
Weight		0.25Kg
PoE		Port1: 802.3af
Local Power supply		54V DC
Built-in antenna		Built-in omni-directional antenna 3dBi antenna gain @2.4GHz 3dBi antenna gain @5GHz
Built-in Bluetooth		Built-in Bluetooth 5.0(Support to switch RFID through software), Support iBeacon standard
Modulation technology		OFDM : BPSK@6/9Mbps、QPSK@12/18Mbps、16-QAM@24Mbps、64- QAM@48/54Mbps DSSS : DBPSK@1Mbps、DQPSK@2Mbps、CCK@5.5/11Mbps (file://dbpsk@1mbps、dqpsk@2mbps、cck@5.5/11Mbps) MIMO-OFDM (11n) : MCS 0-31, MIMO-OFDM (11ac) : MCS 0-11, MIMO-OFDM(11ax) : MCS 0-11
Maximum transmit power		20dBm (Transmit power is multi-chain combined power, no antenna gain is included. The actual transmit power depends on local laws and regulations)
State LED		Alternating flashing mode, orange/green/blue for different working states, breathing mode
Working Temperature		-10°C~55°C(32°F to 113°F)/-40°C~70°C(-40°F to +158°F)
Working Humidity		5%~95%(non-condensing)
Overall power consumption		≤12.95W (excluding IoT modules)
Safety compliance		GB4943, EN60601-1-2, UL/CSA 60950-1, EN/IEC 60950-1, EN/IEC 60950-22
Working frequencies and MIMO		2.4G 2*2 MIMO 0.575Gbps 5G 2*2 MIMO 1.2Gbps
20MHz/40MHz bandwidth		Supported
80MHz bandwidth		Supported
802.11		Indoor, compliant with 802.11a/b/g/n/ac/ax

# Indoor Access Point Switch


## NX-AP5720H-WA6



### TECHNICAL SPECIFICATIONS

SPECIFICATIONS		NX-AP5720H-WA6
Maximum transmission speed	1.775Gbps	
Maximum number of SSIDs for each radio	16	
Maximum number of clients per radio	512	
Advanced Traffic Management	Supported	
Restrict low rate/sticky terminals access	Supported	
Concurrent login of WPA, WPA2, WPA3 and PreRSNA users	Supported	
Station related	Abnormal offline check, station aging, statistics and status query	
Client number limit	Supported	
Link integrity check & Repeater mode	Supported	
Repeater mode	Supported	
Encryption	WEP-64/128/152bit, dynamic WEP, TKIP, AES, EAP, CCMP, WPA3 Multiple triggering conditions for unicast and broadcast key update	
Authentication	802.1X authentication, MAC authentication, PSK authentication, Portal authentication, PPSK	
Forwarding security	Packet filtering, MAC address filtering, Broadcast storm suppression	
Wireless terminal access	Wireless EAD	
SSID and VLAN binding	Supported	
WIDS/WIPS	Supported	
Rogue device detection & countermeasure	Supported	
IP address configuration	Static IP (available only in fat AP mode) DHCP assigned IP (Option 60)	
Native IPv6	Supported	
Local forwarding	Local forwarding based on SSID and VLAN	
SSID-based VLAN assignment	Supported	
Multicast	IGMP Snooping/MLD Snooping	

## Indoor Access Point Switch NX-AP5720H-WA6

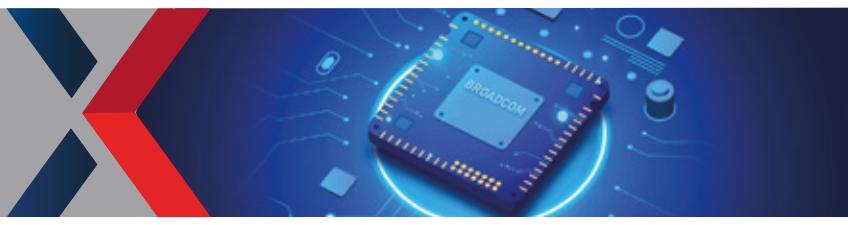

### TECHNICAL SPECIFICATIONS

SPECIFICATIONS		NX-AP5720H-WA6
802.11e	Wi-Fi Multimedia (WMM)	
Priority	802.1p priority and marking on Ethernet ports, Priority mapping for wired and wireless packets	
Layer 2 to Layer 4 packet filtering and traffic classification	Supported	
Layer 4-7 application identification	Coupled with H3C WLAN ACs, the APs can identify variety of applications and policy control can be implemented including priority adjustment, scheduling, blocking, and rate limiting on users	
QoS policy mapping	SSID/VLAN and QoS policy mapping	
Load balancing	Traffic-based load balancing, Session-based load balancing, Frequency-based load balancing (supports dualband)	
Client bandwidth management	Station-based bandwidth allocation SSID-based bandwidth allocation	
Multicast optimization (IPv4/IPv6)	Supported	
Band navigation(5G priority)	Supported	
PPC	Supported	
Green AP mode	Supported	
Dynamic MIMO power saving	Supported	
E-APSD	Supported	
Network management	Trap, HTTP(S), SSH, Telnet, FTP/TFTP, SNMP V1/V2/V3 only applicable in Cloud/Fat mode	
Management SSID	Supported	
Syslog	Supported	
AP Working Mode	Fit/Cloud/Fat	
Remote probing and analysis	Supported	
Wi-Fi Certified	IEEE 802.11a/b/g/n/ac/ax, WMM, WPA, WPA2 and WPA3 – Enterprise, Personal (SAE), Enhanced Open (OWE), Wi-Fi Alliance	

#### USA

Tel +1-877-6774040  
[info@nodexon.com](mailto:info@nodexon.com)  
 Williams Tower, 41st Floor, 2800 Post  
 Oak Boulevard, Houston, TX 77056, USA

#### EUROPE

Tel +44-20-37695558  
[uk@nodexon.com](mailto:uk@nodexon.com)  
 86-90 Paul Street, London, England,  
 United Kingdom, EC2A 4NE

#### MIDDLE EAST

Tel +971 4 556 1557  
[mena@nodexon.com](mailto:mena@nodexon.com)  
 Boulevard Plaza Tower One, Level 3,  
 Downtown Dubai, United Arab Emirates